


COPPER 3 STAR TILE ADHESIVE



DESCRIPTION :

Copper 3 star tile adhesive is high polymer modified, cement based tile adhesive, suitable to install all types of ceramic & vitrified tiles on floor and small to medium format of tiles on wall.

SILVER 4 STAR TILE ADHESIVE



DESCRIPTION :

Silver 4 Star Tiles adhesive is high polymer modified, cement-based tile adhesive, suitable to install medium to large format of ceramic tiles, vitrified tiles & porcelain tiles on floor and wall. Silver 4 Star tile adhesive can also be used for the fixing of ceramic tile on tile applications on floor.

GOLD 5 STAR TILE ADHESIVE



DESCRIPTION :

Gold 5 star Tile Adhesive is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic and glass mosaic. It is also suitable for fixing ceramic, vitrified wall and floor tiles, metal or glass tiles, marble, granite, Quartz Stone, terrazzo and other natural stone in interior and exterior locations.

PLATINUM 7 STAR TILE ADHESIVE



DESCRIPTION :

Platinum 7 Star tiles adhesive is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive to install glass mosaic, glass brick wall, and swimming pool tiles, marble and natural stones on variety of interior and exterior substrates for wall and floor application

COVERAGE:

This will depend on the nature and flatness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq.ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.

SBR LATEX



DESCRIPTION :

SBR Latex is a ready to use liquid based waterproofing system for concrete and mortar to prevent water infiltration or seepage of water in the area of low pressure of concrete structure or any cementitious substrate.

AW+



DESCRIPTION :

AW+ is a liquefied concrete admixture, enforced with anti corrosion agents. Improved workability being the attraction of the product reduces water usage hence minimizing time and work force . It relives the major issue of air gaps in concrete and improves the bonding strength.

EURO SEAL



DESCRIPTION :

EURO SEAL is a single component, acrylic base water proofing Liquid. When it mixed with cement and water at given ratio, Cures to form a tough coating with excellent water resistance, high flexibility and low vapor permeability properties.

TERRA SEAL



DESCRIPTION :

TERRA SEAL is a heavy duty terrace waterproof coating system, composed of specially developed highly elastic & resilient acrylic polymers, properly selected & graded fillers, micro-fibres, additives & best quality as well. It is a three - layer system ensuring proper build-up of the thickness, making it a reliable waterproofing system.

GROUTS

POLYMER BASED CEMENT GROUT



DESCRIPTION :

Awic® POLYMER BASED CEMENT GROUT is a polymer-modified multi color grout. It is a right bonding material to fill joints in all type of wall and floor tiles. They are resistant to shrinkage and cracking and can be used to fill tile joints (walls and floors) with a minimum width of 1 mm to 5 mm for interior and exterior both applications. Available in 11 colors to match your joints tiles made with color-fast pigments and fine graded aggregates.

ADVANTAGES :

- Wide Joint bridging (upto 5 mm)
- Exceptional colour - stability
- Excellent workability, smooth and easy to spread and easy clean-up
- Non-shrinkable and will not crack
- Flexible to withstand pressures created by expansion and contraction of tiles

SHELF LIFE & STORAGE Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool and dry place.

GROUT ADMIX



DESCRIPTION :

Grout Admix is specially designed latex admix to be used with sanded & unsanded grout. It improves the performance of polymer based cement grouts for all type of ceramic tile, brick, marble stone and agglomerate stone installation.

TILE CARE

TILE CLINER



DESCRIPTION :

Awic® Tile Cleaner is a fast acting cleaner for regular cleaning of dirt and stains on tile surfaces. Tile Cleaner is designed for daily maintenance of tiles. It is ideal for interior and exterior use. Can be used on unglazed ceramic tiles, glazed ceramic tiles, Porcelain and Glass Tile.

EPOXY GROUTS



DESCRIPTION :

AWIC® 3 PART EPOXY GROUT IS EPOXY BASE GROUTING COMPOUND. It's Hygienic, hard-wearing, impervious, epoxied resin-based grout with a high degree of resistance to chemical attack, abrasion and impact, the cured grout does not transfer taints to foodstuffs, does not permit the entry of bacteria or dirt and is easily maintained in a sterile condition.



DESCRIPTION :

AWIC® 2 PART EPOXY GROUT IS TWO COMPOUND SYSTEM GROUT WHICH IS VERY SMOOTH AND EASY TO APPLY. It's Hygienic, hard-wearing, impervious, epoxied resin-based grout with a high degree of resistance to chemical



GOLD



SILVER

COPPER

Sl. No	Testing parameter	Test Result
--------	-------------------	-------------

1	Joint Width	15 mm
2	Pot Life	50 min
3	Time to Foot Traffic	24 hrs
4	Time to Heavy Traffic	48 hrs
5	Specific Gravity	1.6 to 1.7 kg/ltr
6	Shrinkage	No Shrinkage
7	Water Cleaning	< 60 min
8	Setting Time	> 3 hrs
9	Sag	No sagging

ns combined with a filler powder. It's resistant to stains. It's durability is high in high-traffic areas.


to mix, chemical resistant joint filler and is:

ACCESSORIES

ACCESSORIES

SPACERS

Sizes : 2mm, 3mm, 4mm,
5mm, 6mm,
8mm, 10mm

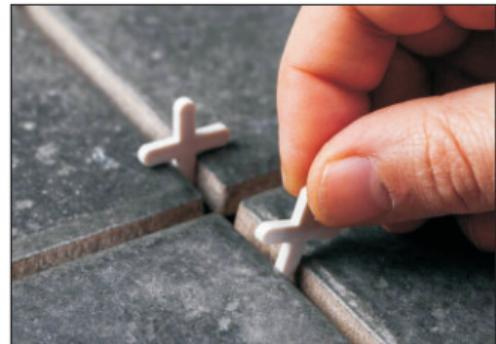

LAMELERS



CLIP LAMELERS



JET LAMELERS



SCRUE LAMELERS

Tile leveling systems are on-site tool that is designed for leveling and preventing the creation of lippage during tile installations. They help to interlock the tiles, ensuring that the tiles remain level once laid, and you achieve a smooth and flat surface while the adhesive dries.

TOOLS



PLIER



GROUT APPLICATOR



TROWEL

COMMING SOON



DESCRIPTION :

Awic® Tile Master is a polymer additive which needs to be pre-mix with cement / cement & sand and then should be mixed with water for installing tiles and natural stones using the traditional cement slurry over freshly laid leveling bed/ machan.

ADVANTAGES :

Increases open time
Increases bond strength

ACC BLOCK FIX



DESCRIPTION :

Awic® Block Fix is a non-refractory mortar, used for laying AAC blocks. It is a self-curing mortar made from cement, sand, and polymeric additives, which ensure excellent bonding and durable strength between the blocks.

READY PLAST



DESCRIPTION :

Awic® Ready Plast is premixed plaster designed to provide smooth and compact surfaces both internal and external. awic ready plast is a blend of portland cement, supplementary cementitious material, selected graded sand and polymer additives in the right proportion for perfect compactness and desired smoothness of the surface.